

Technical Data Sheet

S 3302a/4.5-10



S 3302a/4.5-10 is a heavy duty round-burl-mat based on NR/SBR (hardness 80 Shore A) laminated on a foam based on polyethylene (PE-foam).

Technical Data		
Thickness (approximate)	[mm]	15.0
Weight (approximate)	[kg/m ²]	6.0
Thermal Stability Long Term	[°C]	90
Cold Resilience	[°C]	- 40 °C
Hardness Shore A		80
Burning Behavior DIN 75 200/ FMVSS 302		combustion value < 100 mm/min

Main Function: Airborne sound insulation, heat insulation

Applications: Floor mats in vehicle cabins, armoured vehicles


Processing: Mechanical attachment
Processing temperature: 18 - 25 °C

Storage conditions: Dry at temperatures between 18 - 35 °C
Max. storage time: unlimited

Delivery Form: Standard boards 1000 x 1600 mm, other sizes and cut-to-size pieces upon request

Technical Data Sheet

S 3302a/4.5-10

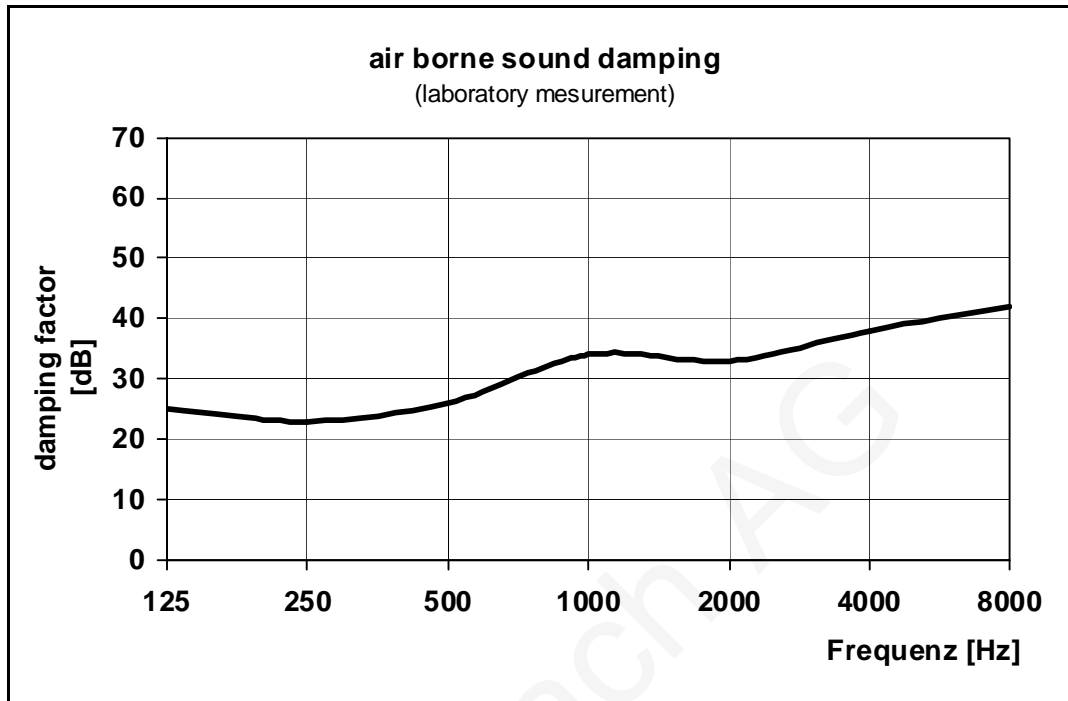

The technical data (average values) as well as material information are based on our present knowledge and experiences. They free the user because of the fullness of possible influences by the application of our products, however, not from own tests and attempts in the approach of the real application. Because of the peculiarities of every individual case we can take over no liability for our indications. On request we are available gladly with information.