


Technical Data Sheet

S 3600/-L/GG

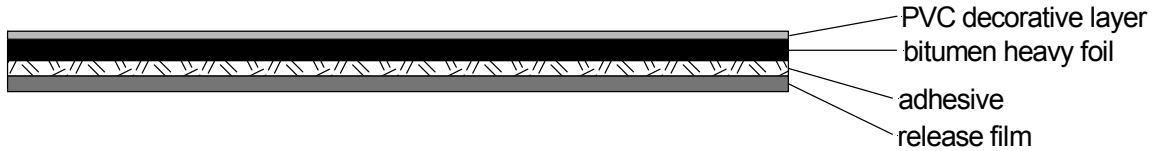


S 3600/-L/GG is a heavy foil based on bitumen, laminated with a PVC-based imitation leather, colored grey-green. Self adhesive equipment with a high-quality adhesive system based on acrylate.

Technical Data			
Type		S 3600/2.1-L/GG	S 3600/3.2-L/GG
Thickness (approximate)	[mm]	3.0	4.5
Weight (approximate)	[kg/m ²]	4.5	6.5
Loss Factor DIN EN ISO 6721-3: d _{200 Hz} at 20 °C on 1 mm steel sheet		0.150	
Thermal Stability Long Term	[°C]	100	
Cold Resilience	[°C]	- 40 °C (bonded)	
Burning Behavior DIN 75 200/ FMVSS 302		combustion value < 100 mm/min	

- Main Function:** Structure borne sound dampening and air borne sound insulation
- Applications:** Vehicle cabins, noise protection cabinets, mechanical engineering, interior paneling etc.
- Processing:** The surface must be carefully cleaned from dust, grease, oil and water. Full area adhesion has to be insured. The adhesion strength is directly dependent from the processing pressure. The material has to be pressed in firmly, e.g. using a feed roll.
 Processing temperature: 18 - 35 °C
- Storage conditions:** Dry at temperatures between 18 - 35 °C
 Max. storage time: 6 months
- Delivery Form:** Standard boards 1600 x 1000 mm, other sizes and cut-to-size pieces upon request

Technical Data Sheet

S 3600/-L/GG

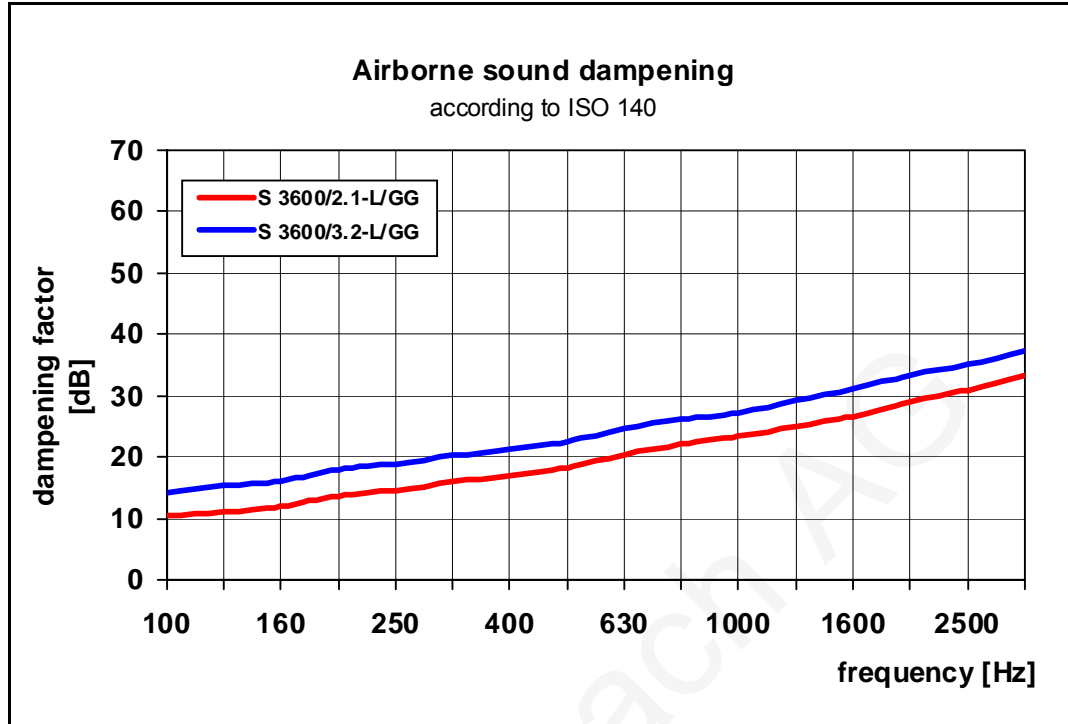

The technical data (average values) as well as material information are based on our present knowledge and experiences. They free the user because of the fullness of possible influences by the application of our products, however, not from own tests and attempts in the approach of the real application. Because of the peculiarities of every individual case we can take over no liability for our indications. On request we are available gladly with information.