


Technical Data Sheet

S 3700/20-DT/G

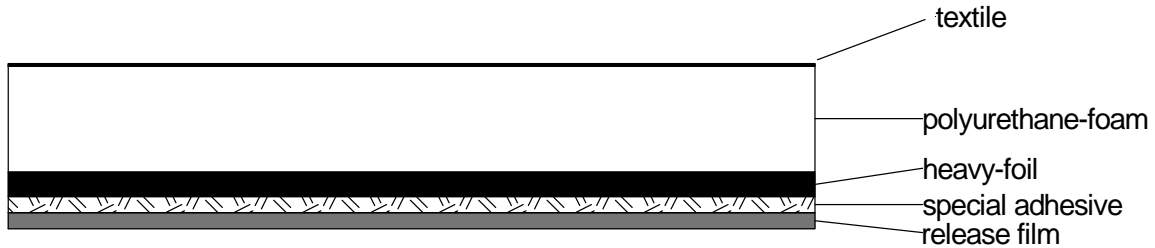

S 3700/20-DT/G is a polyurethane-foam, covered with high-class textile-fabric, colour grey. Self adhesive equipment with an increase humidity resistant adhesive system based on acrylate.

Technische Data		
Thickness (approximate)	[mm]	25.0
Density (approximate)	[kg/m ²]	6.0
Loss Factor acc. DIN EN ISO 6721-3: d _{200 Hz} bei 20 °C steel sheet 1 mm		0.080
Thermal Stability Long Term	[°C]	100
Cold Resilience	[°C]	- 40 °C
Burning Behavior DIN 75 200/ FMVSS 302		combustion value < 100 mm/min

Main Function: Airborne sound absorption, structure-bone sound insulation, airborne sound insulation

Applications: Vehicle cabs, inner lining etc.


Processing: The surface must be carefully cleaned from dust, grease, oil and water. Full area adhesion has to be insured. The adhesion strength is directly dependent from the processing pressure. The material has to be pressed in firmly, e.g. using a feed roll.
 Processing temperature: 18 - 25 °C

Storage conditions: Dry at temperatures between 18 - 35 °C
 Max. storage time: 12 months

Delivery Forms: Standard boards 1000 x 2000 mm, other sizes and cut-to-size pieces upon request

Technical Data Sheet

S 3700/20-DT/G

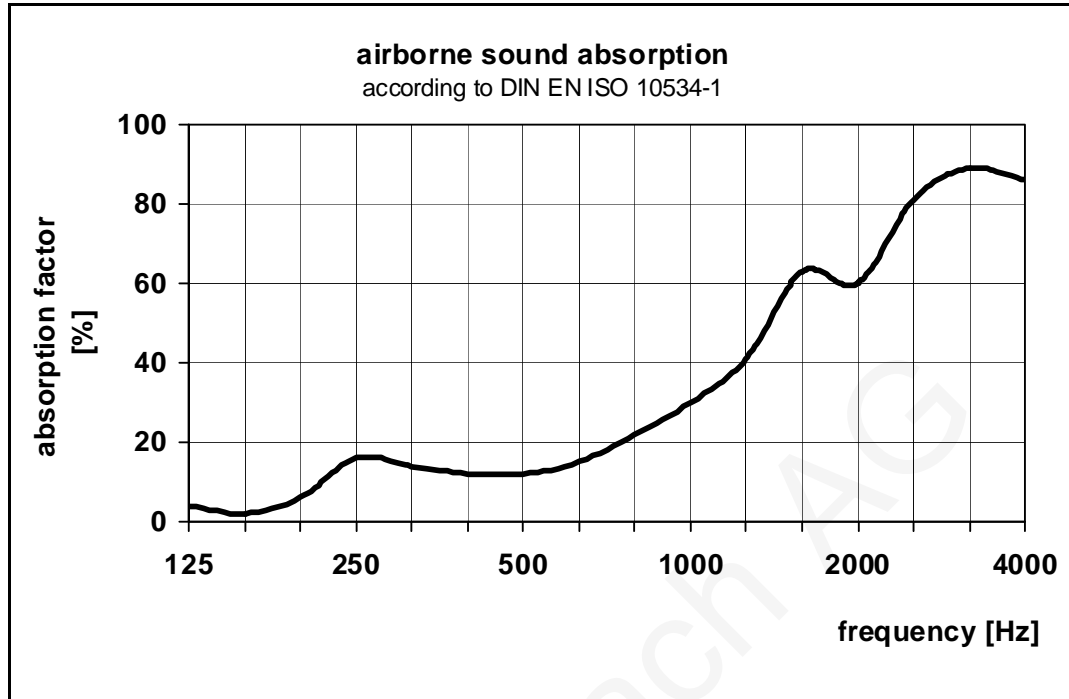

The technical data (average values) as well as material information are based on our present knowledge and experiences. They free the user because of the fullness of possible influences by the application of our products, however, not from own tests and attempts in the approach of the real application. Because of the peculiarities of every individual case we can take over no liability for our indications. On request we are available gladly with information.